













# 高性能オールラウンド 強力型ローリングマシン

## THI-18R,20R,22R,25R,

## THREAD ROLLING MACHINE


	仕様				転造圧 Threads pressure	出力 Power	回転数 Speeds	ダイスポケット Standard die pockets	ストローク Standard stroke	ダイスサイズ Standard die	重量 Weight (net)	タンク容量 Coolant (litros)
	Threads without points											
	Max	Max	Max	Max								
												
18R	M18	150	50	80	26,500kg	4P 22kW	43 55 70 (3steps)	L W H 284×47×165 320×60×165	630	L W H 280×50×50 310×50×50	10ton	120ℓ
20R	M20	180	80	100	27,800kg	4P 30kW	37 47 60 (3steps)	L W H 305×62×200 340×65×200	680	L W H 300×60×60 330×60×60	13ton	150ℓ
22R	M22	180	80	100	30,800kg	4P 30kW	37 47 60 (3steps)	L W H 320×62×200 350×65×200	720	L W H 320×60×60 350×60×60	13ton	150ℓ
25R	M27	300	80	220	40,300kg	4P 45kW	31 37 44 (3steps)	L W H 403×73×250 470×73×250	930	L W H 400×60×85 450×60×85	23ton	140ℓ

- モデルチェンジした18R,20R,25R型、新しく追加になった22R。機能、使い易さ共に一層充実した内容でパワーアップ。
- 極太径のネジ転造や太径の同時転造に適した超強力型マシン。
- 2スターター機構採用のため、より一層安定したネジができます。(25R型のみ)




※写真はTHI-25R


### 外形寸法

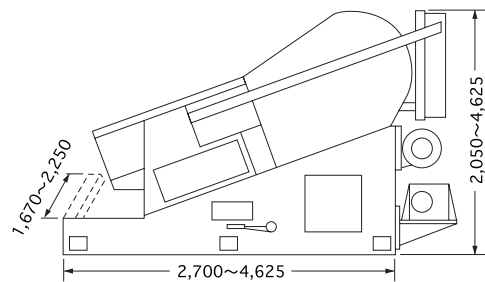


### オプション

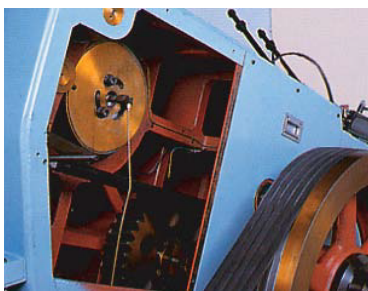

▲駆動カム部

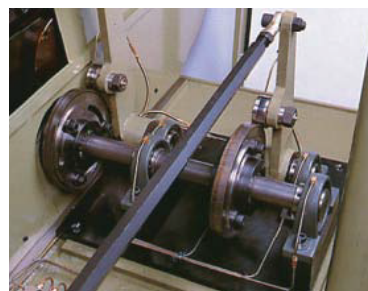

▲2スターターカム(25R型のみ)



▲テンションバー(オプション)

