












スムーズな供給と安定性で定評の高速生産マシン

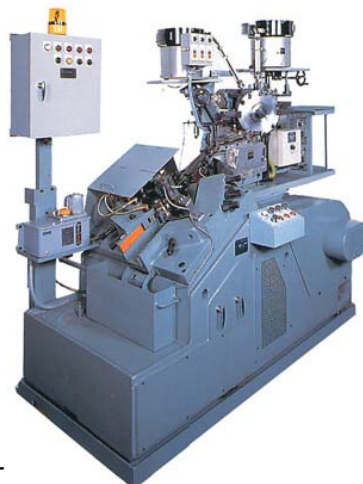
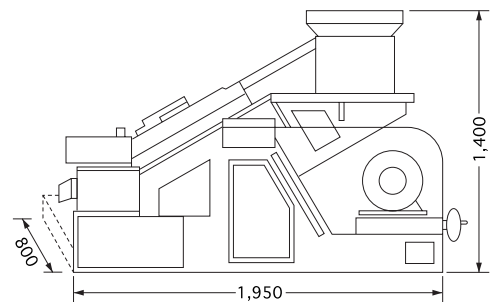
THI-SRD

ROTARY ROLLING MACHINE

	仕様				転造圧 Threads pressure	出力 Power	50Hz回転数		60Hz回転数		ダイスサイズ Standard die type	重量 Weight (net)	タンク容量 Coolant (litros)
	Threads without points						Speeds 1	Speeds 2					
	Max	Max	Max	Max									
							RPM 	RPM 					
SRD-80	M8	75	45	30	6,300kg	6P7.5kW 4P11kW	50 120~600 50 172~900	60 145~730 60 206~1100	Roller : Seg 1 : 4×60 ^H	2.5ton	52		
SRD-120	M12	75	45	30	9,900kg	6P7.5kW 4P11kW	50 120~600 50 192~900	60 145~730 60 206~1100	Roller : Seg 1 : 3×60 ^H				
SRD-160	M16	75	45	30	17,000kg	4P15kW	50 120~600 50 175~900	60 145~730 60 206~1100	Roller : Seg 1 : 3×80 ^H	4.5ton	仕様により 決定		
SRD-220	M22	75	45	30	27,000kg	4P22kW	50 120~600 50 175~900	60 145~730 60 206~1100				5ton	

- スムーズな供給と安定した高速回転で定評あるロータリーローリングマシン。
M8以下なら SRD80型、M12以下ならSRD120型を用意してます。

外形寸法



SRD120/10AV-3
センサーはオプションです